




1030MHz PASS BAND FILTER

CSG 401040 NX

Technical Specifications:

PARAMETERS	SPECIFICATIONS
Frequency Range	1020 ~ 1040 MHz
Insertion Loss	≤ 0.5 dB
Ripple In-Band	≤ 0.2 dB
Rejection	≥ 30dB @ 1500 MHz ≥ 40dB @ 1700 MHz ≥ 50dB @ 1850 MHz ≥ 60dB @ 2050 ~ 3000 MHz
VSWR	≤ 1.5:1
Power	200W (CW) 2000W (Peak)
Impedance	50 Ω
Connector	N-Female
Dimension (Approx)	100 x 47 x 34 mm
Weight (Approx)	400 grams
Operating Humidity	5 ~ 95%
Temperature	-25 ~ +50 °C
Environmental	Indoor Application

Structure Dimensions:

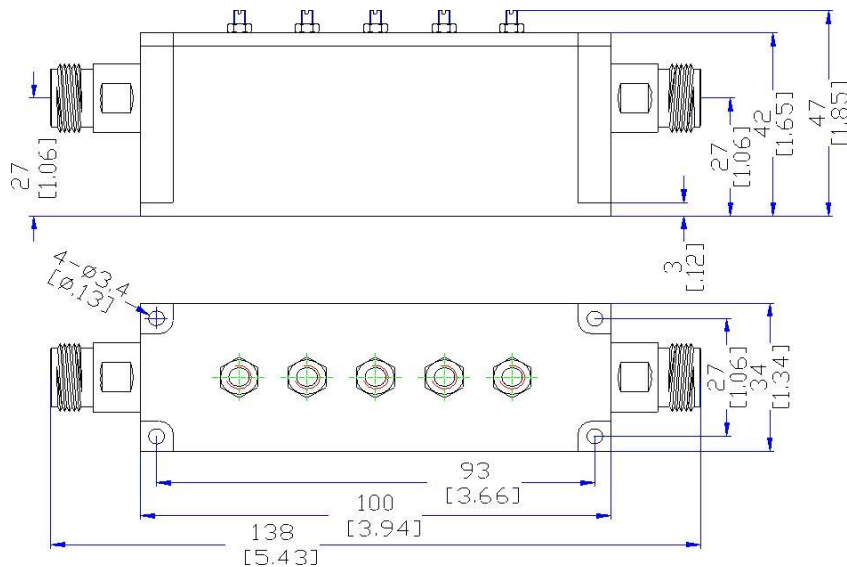



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA
E-mail : sales@csgnets.com, Website : www.csgnets.com