


2 Way Power Splitter CSG 3800100-2NC


PARAMETERS	SPECIFICATIONS
Frequency Band	800-2500 MHz
Impedence	50 Ω
Division Ratio	3.01 dB
Insertion Loss	≤ 3.26 dB
VSWR	$\leq 1.2:1$
Input Power	≤ 100 Watt
PIM	$\leq -140@+43$ dBm x 2dBc
Ripple in band	$\leq \pm 0.2$ dB
Input Connector	N (Female)
Dimensions (Approx.)	223 x 61 x 37 mm
Weight (Approx.)	0.40 kg
Operating Temperature	-30 ~ +70 $^{\circ}$ C

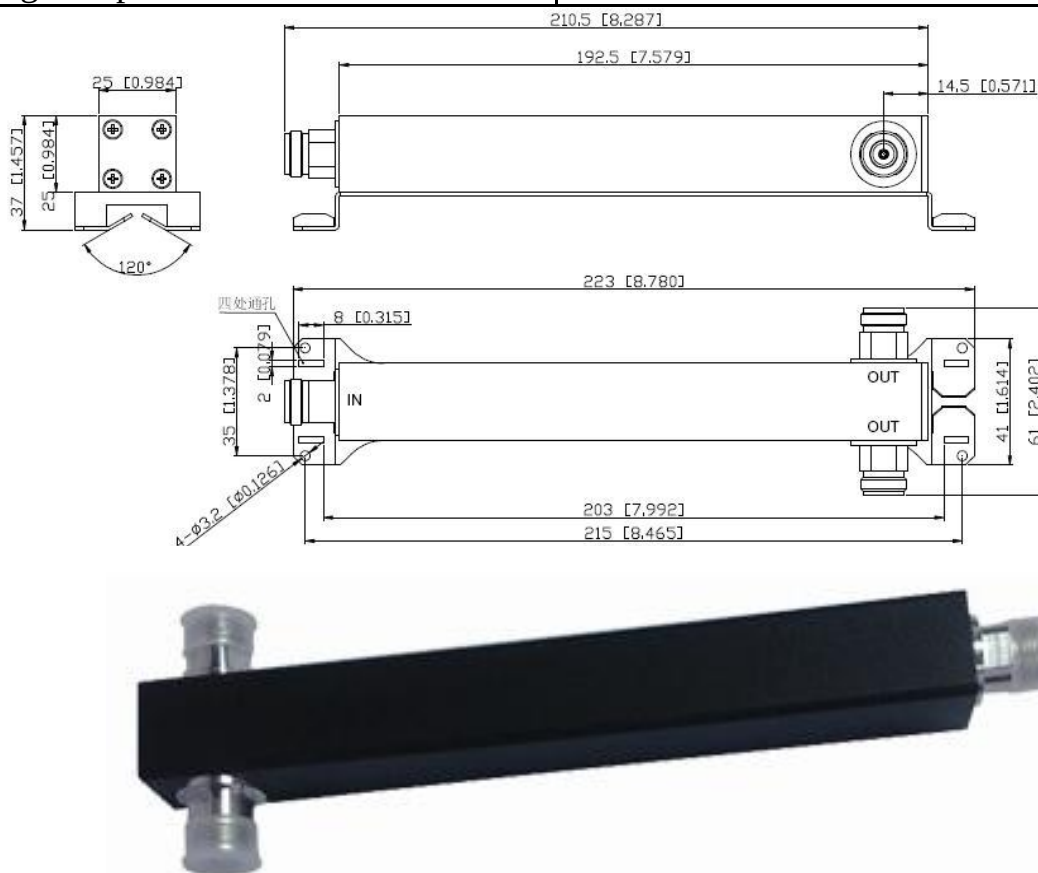

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

3 Way Power Splitter CSG 3800100-3NC


PARAMETERS	SPECIFICATIONS
Frequency Band	800-2500 MHz
Impedence	50 Ω
Division Ratio	4.77 dB
Insertion Loss	≤ 5.02 dB
VSWR	$\leq 1.2:1$
Input Power	≤ 100 Watt
PIM	$\leq -140@+43$ dBm x 2dBc
Ripple in band	$\leq \pm 0.2$ dB
Input Connector	N (Female)
Dimensions (Approx.)	236 x 61 x 37 mm
Weight (Approx.)	0.40 kg
Operating Temperature	-30 ~ +70 $^{\circ}$ C

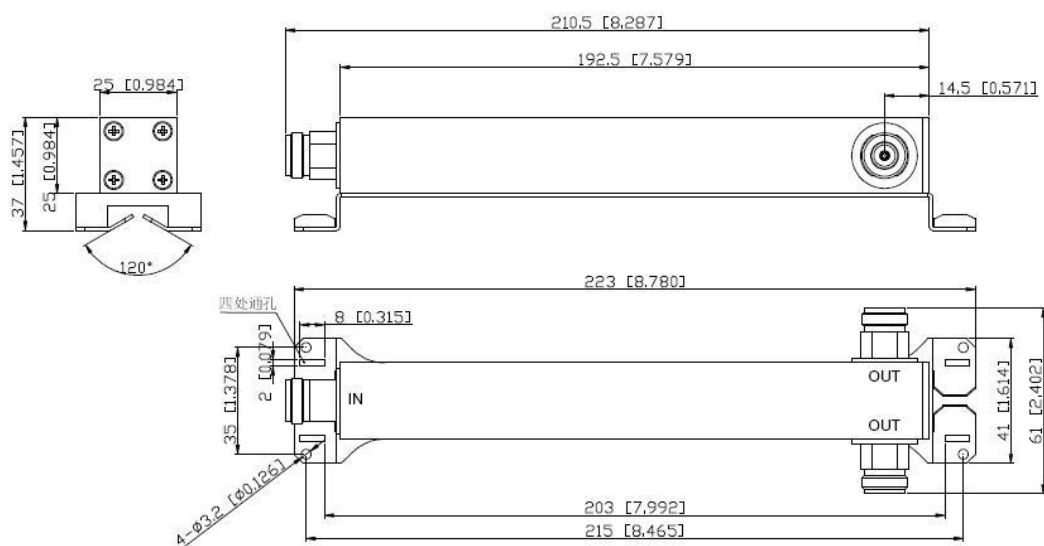

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

4 Way Power Splitter CSG 3800100-4NC

PARAMETERS	SPECIFICATIONS
Frequency Band	800-2500 MHz
Impedence	50 Ω
Division Ratio	6.02 dB
Insertion Loss	≤ 6.27 dB
VSWR	$\leq 1.2:1$
Input Power	≤ 100 Watt
PIM	$\leq -140@+43$ dBm x 2dBc
Ripple in band	$\leq \pm 0.2$ dB
Input Connector	N (Female)
Dimensions (Approx.)	233 x 61 x 55 mm
Weight (Approx.)	0.51 kg
Operating Temperature	-30 ~ +70 $^{\circ}$ C

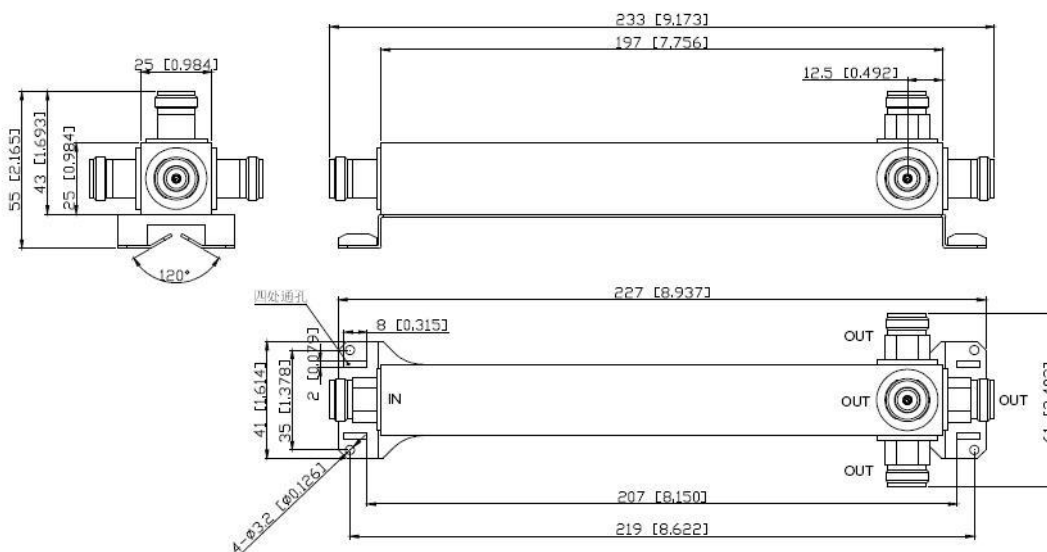

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT