





PCN & LTE Dual Band Diplexer CSG 171270 PCN-LTE-DDIN

PARAMETERS	SPECIFICATION	
Ports	PCN	LTE
Frequency Band	1710 ~ 1880 MHz	2500 ~ 2700 MHz
Insertion Loss	≤ 0.2 dB	≤ 0.2 dB
Band Ripple	≤ 0.2 dB	≤ 0.2 dB
VSWR	≤1.3:1	≤1.3:1
Isolation	≥80 dB @ 2500 ~ 2700 MHz	≥80 dB @ 1710 ~ 1880 MHz
PIM3	≤-150dBc@2x43dBm	
Power Rating	≥300 Watt	
Impedance	50 Ω	
Connectors	DIN-Female	
Temperature	-20 ~ + 65 °C	
Operating Humidity	5 ~ 95 %	
Dimension (Approx)	218.6 × 91 × 47 mm	
Color	Black or Light Grey	
Weight	2500 grams	
Environmental	IP 65	

Structure Drawing:

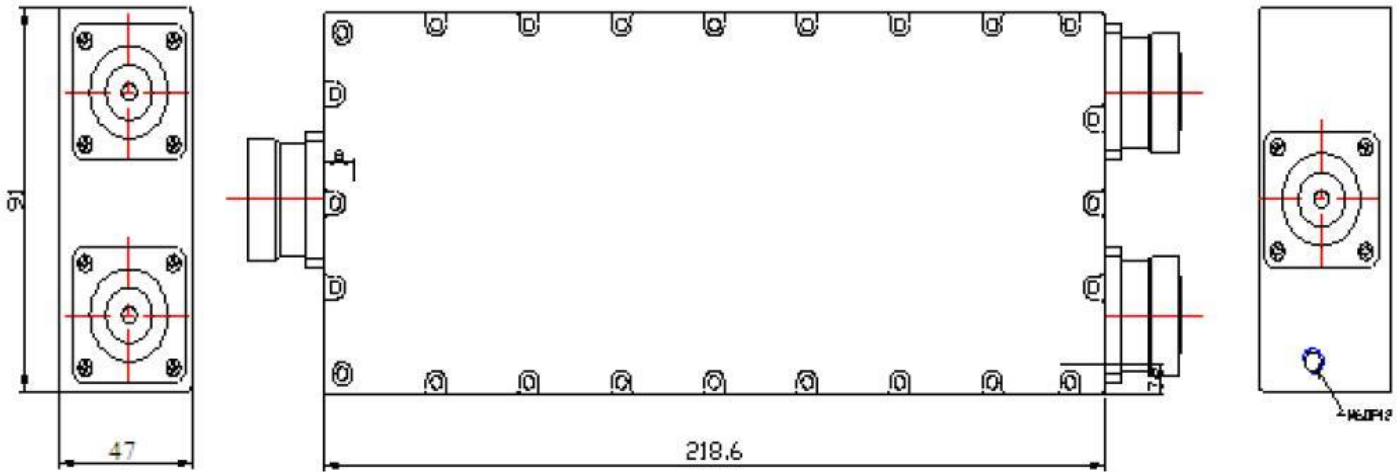

Product Image:

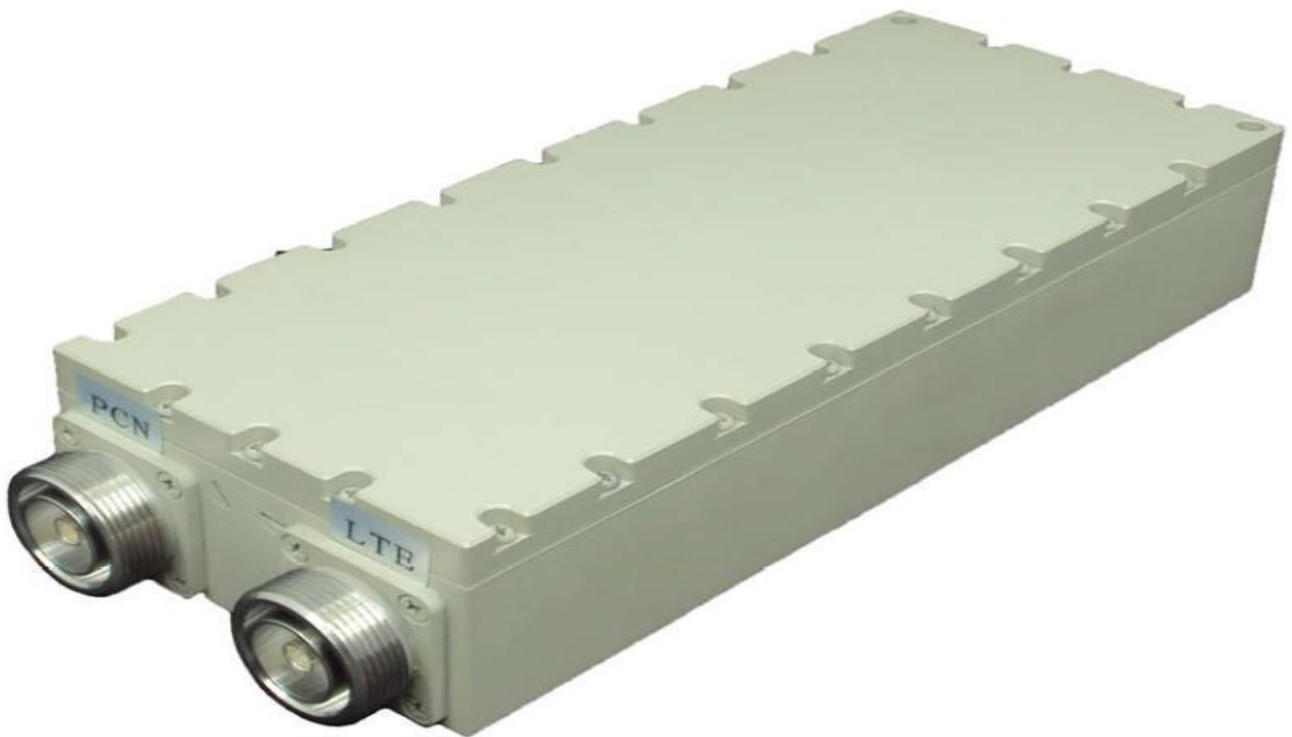

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT