






CDMA & GSM/DCS/UMTS/LTE Quadplexer

CSG 182690 CG-D-U-LTE-QDIN

PARAMETERS	SPECIFICATION			
	CDMA/GSM	DCS	WCDMA	LTE
Frequency Band	806 ~ 960 MHz	1710 ~ 1880 MHz	1920 ~ 2170 MHz	2500 ~ 2700 MHz
Insertion Loss	≤ 0.2 dB	≤ 0.5 dB	≤ 0.5 dB	≤ 0.5 dB
Band Ripple	≤ 0.4 dB	≤ 0.4 dB	≤ 0.4 dB	≤ 0.4 dB
Isolation	70dB@1710~1880 MHz 70dB@2110~2170 MHz 70dB@2500~2690 MHz	70dB@806~960 MHz 65dB@2110~2170 MHz 70dB@2500~2690 MHz	70dB@806~960 MHz 65dB@1710~1880 MHz 70dB@2500~2690 MHz	70dB@806~960 MHz 65dB@1710~1880 MHz 65dB@2110~2170 MHz
VSWR	≤1.3:1			
PIM3	≤-150dBc@2x43dB			
Power	≥ 250 Watt			
Impedance	50 Ω			
Connectors	DIN-Female			
Temperature	-25 ~ + 60 °C			
Operating Humidity	5 ~ 95 %			
DC Pass	All Ports DC Pass			
Dimension	210 x 202 x 55 mm			
Weight	3000 grams			
Environmental	IP 68			

Structure Drawing:

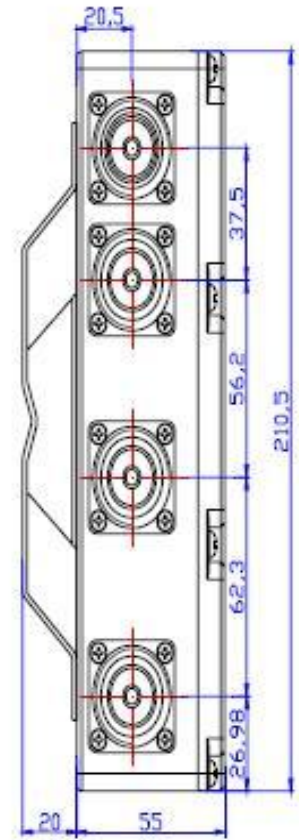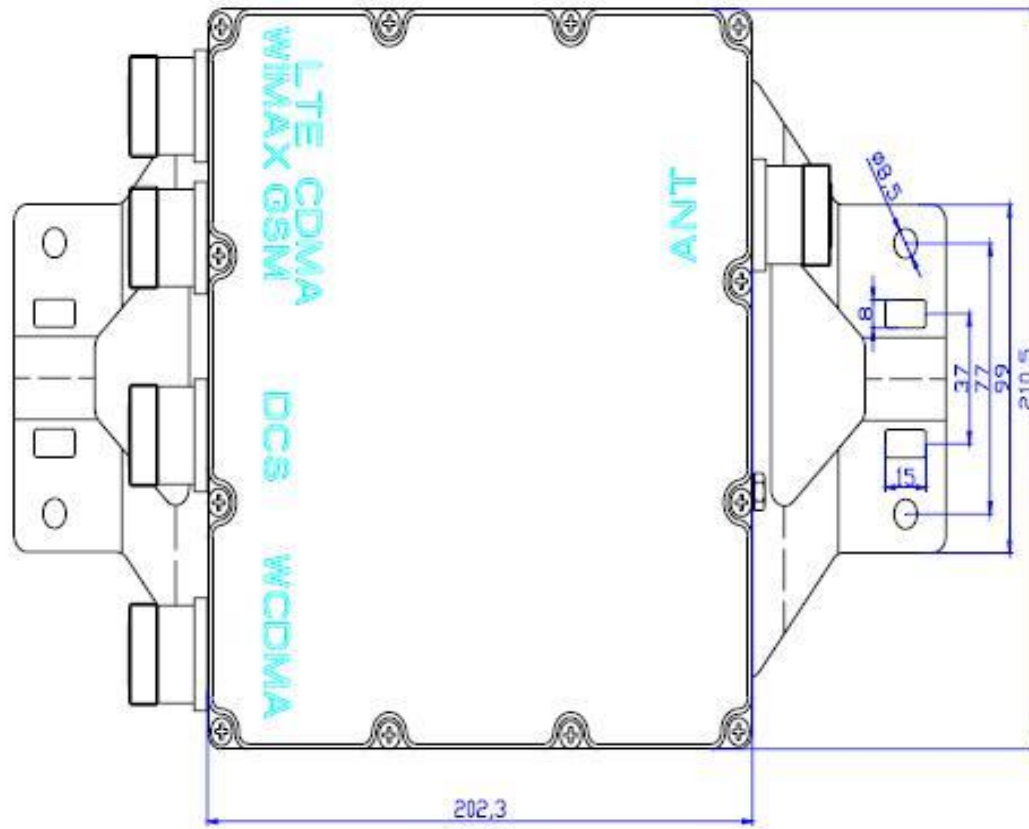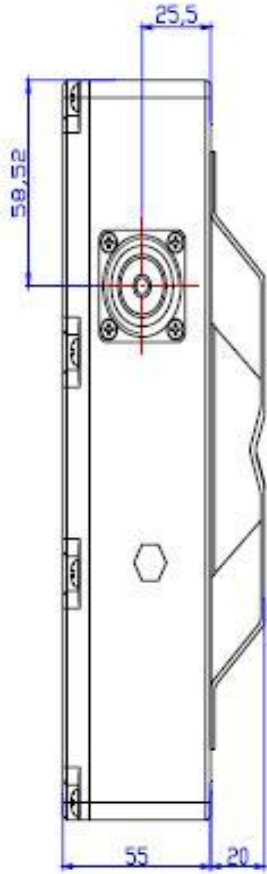

Product Image:



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA
E-mail : sales@csgnets.com, Website : www.csgnets.com