




DIGITAL UHF /TETRA Duplexer CSG 1410 NXA

PARAMETERS	SPECIFICATION	
Port	Port 1	Port 2
Frequency Band	416.40 ~ 421.40 MHz	425.00 ~ 430.00 MHz
Band Width	5 MHz	5 MHz
Insertion Loss	≤ 1.5 dB	≤ 1.5 dB
Band Ripple	≤ 1.0 dB	≤ 1.0 dB
Return loss	≥ 18	≥18
Isolation	≥60 dB @ 425.00 ~ 430.00 MHz	≥60 dB @ 416.00 ~421.00 MHz
Power Rating	≤ 100 Watt	
Impedance	50 Ω	
Connectors	N-Female	
Temperature	-25 ~ + 55 °C	
Operating Humidity	5 ~ 95 %	
Dimension (Approx)	222 × 168 × 58 mm	
Environmental	For Indoor Application	
Weight	3000 grams	

Structure Drawing:

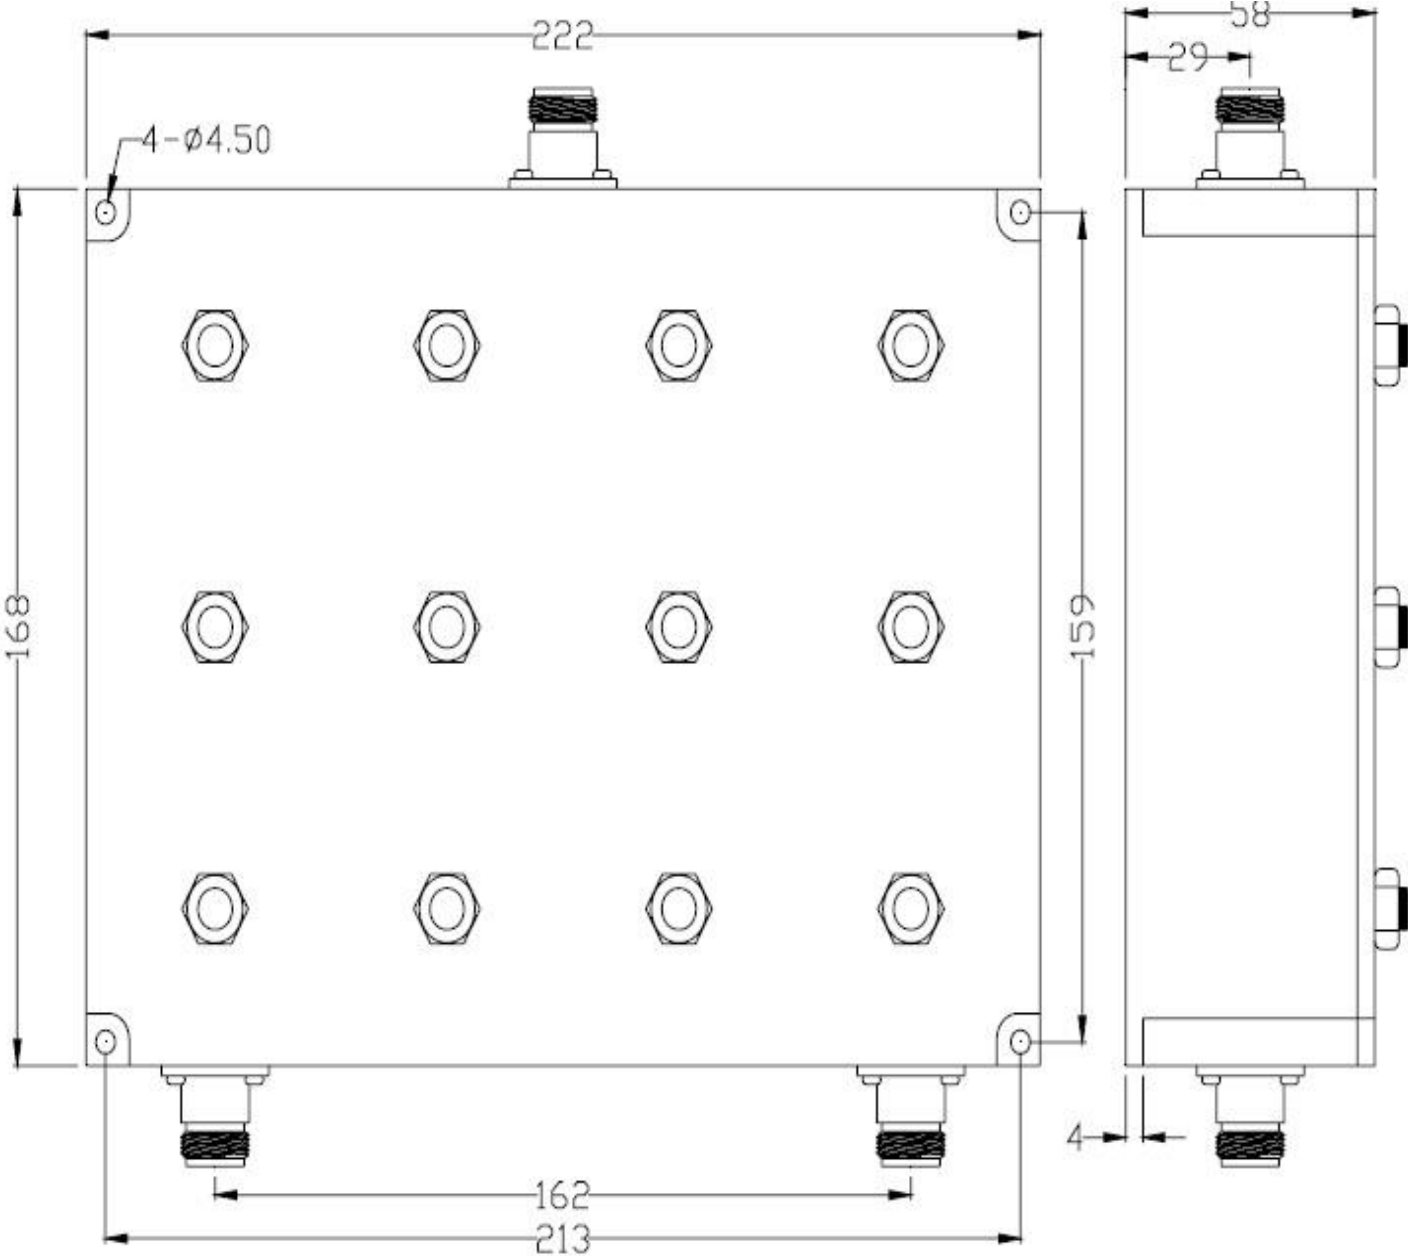

Product Image:



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA
E-mail : sales@csgnets.com, Website : www.csgnets.com