




TETRA+GSM 900 MHz Diplexer CSG 14900 NX

PARAMETERS	SPECIFICATION	
Ports	Port 1	Port 2
Frequency Band	380 ~ 440 MHz	800 ~ 960 MHz
Insertion Loss	≤ 0.5 dB	≤ 0.5 dB
Band Ripple	≤ 0.3 dB	≤ 0.3 dB
VSWR	≤ 1.3:1	≤ 1.3:1
Isolation	≥ 80 dB @ 800~960 MHz	≥ 80 dB @ 380~440 MHz
Power Rating	≤ 100 Watt	
Impedance	50 Ω	
Connectors	N-Female	
Temperature	-25 ~ + 65 °C	
Operating Humidity	5 ~ 95 %	
Dimension (Approx)	268 × 132 × 60 mm	
Weight	2000 grams	

Structure Drawing:

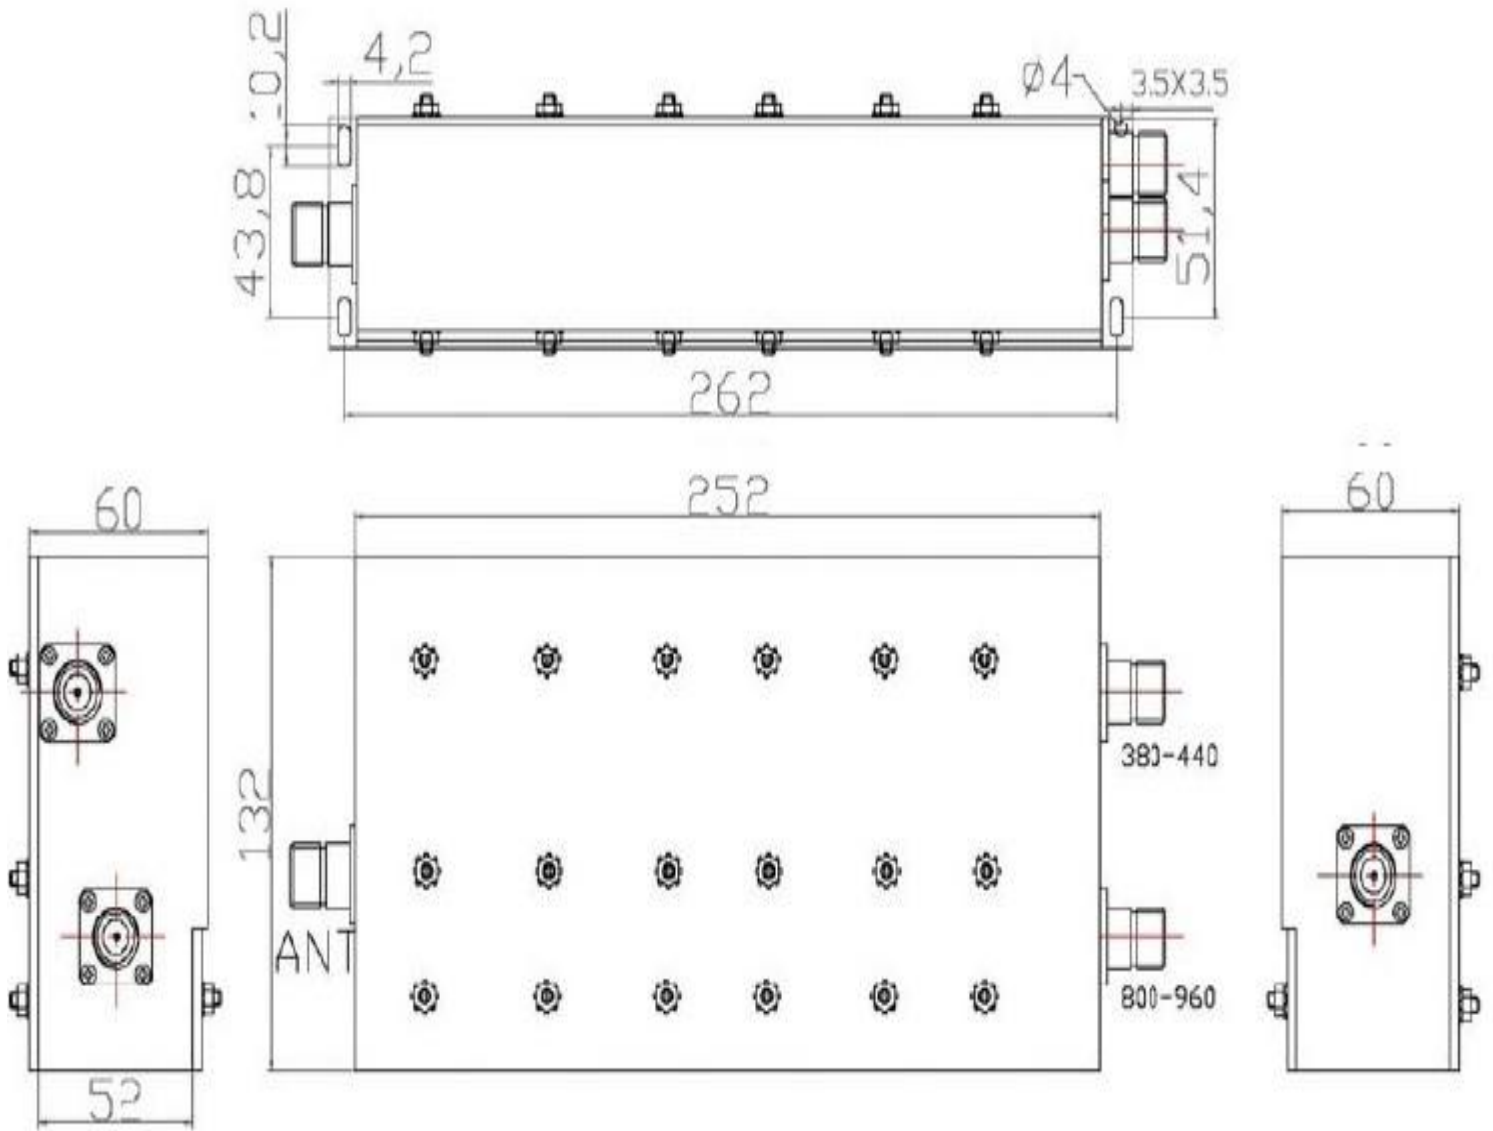

Product Image:



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA
E-mail : sales@csgnets.com, Website : www.csgnets.com