




TETRA/GSM/UMTS Triplexer CSG1492100 NTX

PARAMETERS	SPECIFICATION		
	Port 1	Port 2	Port 3
Ports			
Frequency Band	380 ~ 440 MHz	800 ~ 960 MHz	1710 ~2170 MHz
Insertion Loss	≤ 0.5 dB	≤ 0.5 dB	≤ 0.5 dB
Band Ripple	≤ 0.3 dB	≤ 0.3 dB	≤ 0.3 dB
Isolation	≥80dB@Port 2 ≥80dB@Port	≥80dB@Port 1 ≥80dB@Port 3	≥80dB@Port 1 ≥80dB@Port 2
Return loss	≥16dB		
Power	≤ 100 Watt		
Impedance	50 Ω		
Connectors	N-Female		
Temperature	-40 ~ + 60 °C		
Operating Humidity	5 ~ 90 %		
Weight	1800 grams		
Dimension	210 x 112 x 88 mm		

Structure Drawing:

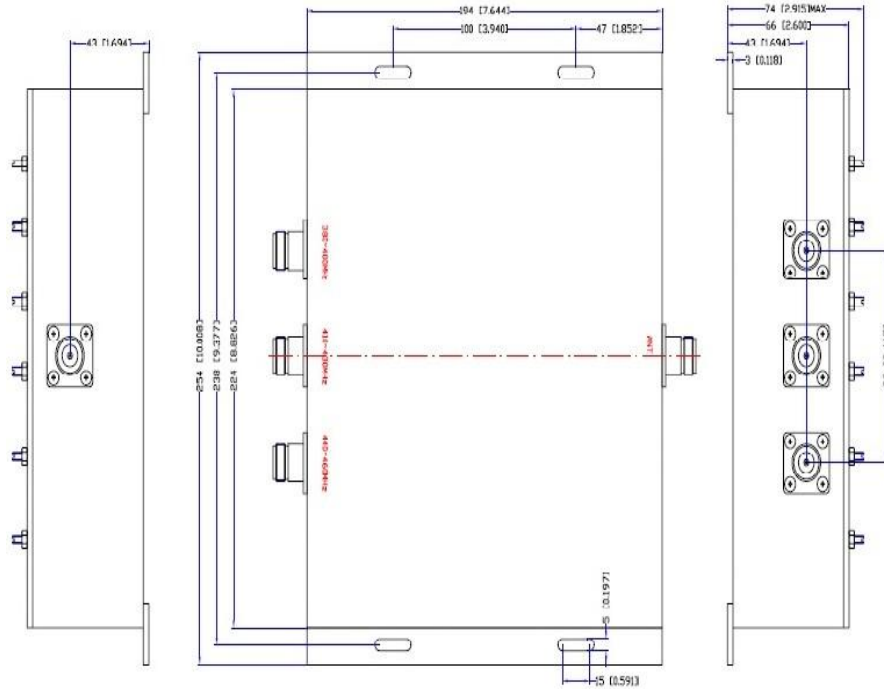

Product Image:



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA

E-mail : sales@csgnets.com, Website : www.csgnets.com