




## TETRA 1 + TETRA 2 + UHF Triplexer CSG 1400 NTX

PARAMETERS	SPECIFICATION		
Ports	Port 1	Port 2	Port 3
Frequency Band	380 ~ 400 MHz	410 ~ 430 MHz	440 ~ 460 MHz
Insertion Loss	≤ 1.0 dB	≤ 1.0 dB	≤ 1.0 dB
Band Ripple	≤ 0.8 dB	≤ 0.8 dB	≤ 0.8 dB
Isolation	≥60dB@Port 2 ≥60dB@Port 3	≥60dB@Port 1 ≥60dB@Port 3	≥60dB@Port 1 ≥60dB@Port 2
Return loss	≥20dB		
Power	≥ 100 Watt		
Impedance	50 Ω		
Connectors	N-Female		
Temperature	-40 ~ + 60 °C		
Operating Humidity	5 ~ 95 %		
Weight	3500 grams		
Dimension	224 x 194 x 66 mm		

# Structure Drawing:

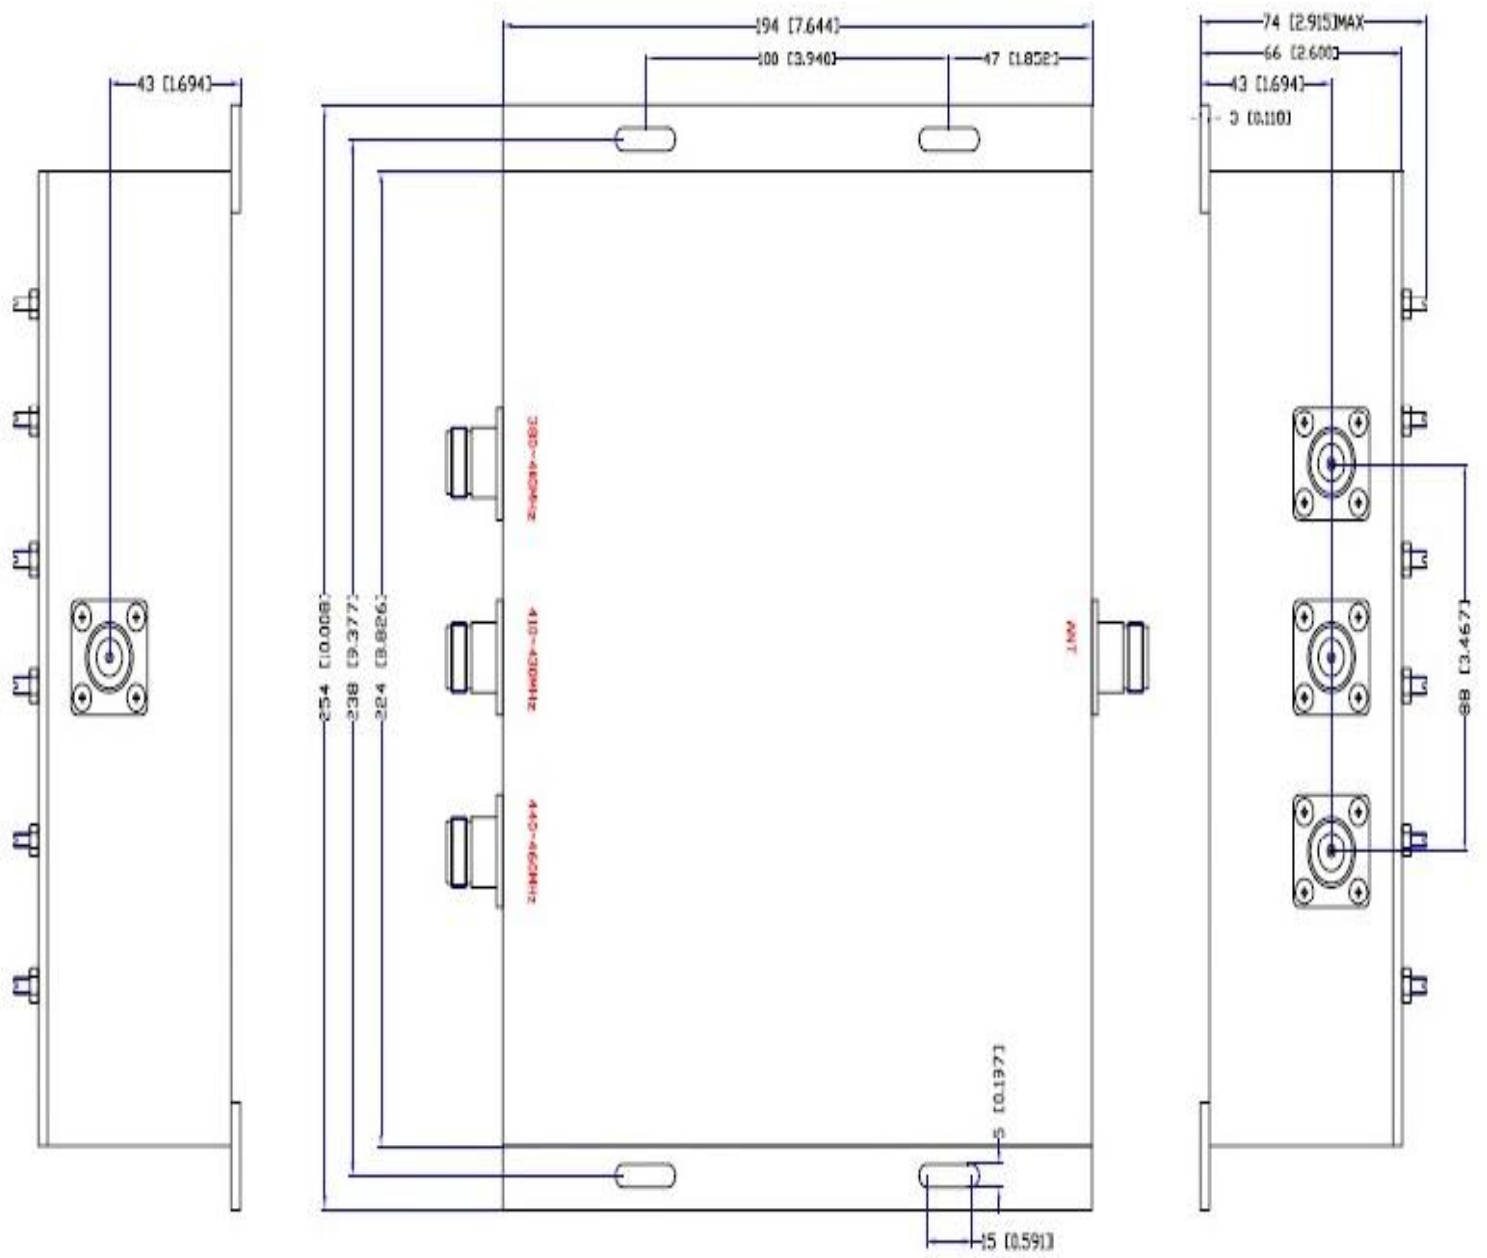

Product Image:



**WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT**

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA  
E-mail : [sales@csgnets.com](mailto:sales@csgnets.com), Website : [www.csgnets.com](http://www.csgnets.com)