


UHF HYBRID FERRITE TRANSMITTER COMBINER

CSG 33650-2HFTC-50W

PARAMETERS	SPECIFICATIONS
Frequency Band	300-650 MHz
No. of Channels	2
Power Per Channel (Max.)	50 watt
Insertion Loss	$\leq 4.0\text{dB}$
Isolation Tx/Tx	$\geq 100\text{dB}$
Isolation Ant/Tx	$\geq 70\text{ dB}$
Impedance	50Ω
VSWR In/Out (Max.)	1.1:1/1.3:1
Isolator	Dual
Connectors	N-Female
Temperature Range	$-30^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Dimensions(H×W×D)	89×483×369mm
Weight(Approx.)	8.2 kg

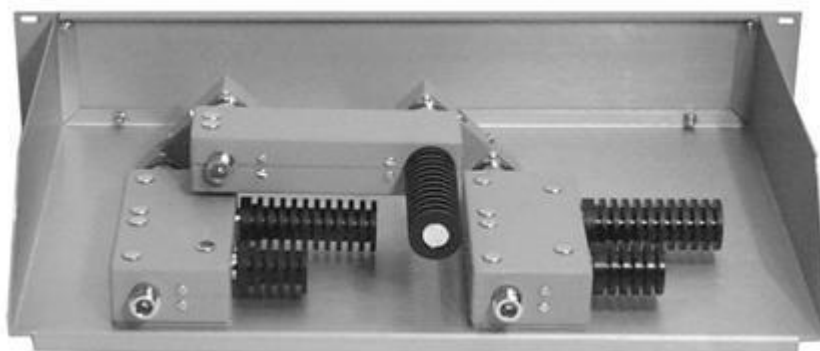

**OPTIONAL: HYBRID FERRITE TRANSMITTER COMBINER IN OTHER CAPACITY e.g 2, 4,
CHANNELS ARE AVAILABLE**