





UMTS 900 / UMTS 2100 Four Band Quadplexer RT 192100 USXR

PARAMETERS	SPECIFICATION			
Ports	Port A	Port B	Port C	Port D
Frequency Band	880 ~ 915 MHz	925 ~ 960 MHz	1920 ~ 1980 MHz	2110 ~2170 MHz
Insertion Loss	≤ 1.0 dB	≤ 1.0 dB	≤ 1.0 dB	≤ 1.0 dB
Band Ripple	≤ 0.6 dB	≤ 0.6 dB	≤ 0.6 dB	≤ 0.6 dB
Isolation	≥70dB@Port B ≥70dB@Port C ≥70dB@Port D	≥70dB@Port A ≥70dB@Port C ≥70dB@Port D	≥70dB@Port A ≥70dB@Port B ≥70dB@Port D	≥70dB@Port A ≥70dB@Port B ≥70dB@Port C
VSWR	≤1.3 : 1			
Power	≤50 Watt			
BTS Ports	4			
Antenna Port	1			
Impedance	50 Ω			
Connectors	SMA-Female			
Temperature	-25 ~ + 60 °C			
Operating Humidity	5 ~ 95 %			
Weight	2800 grams			
Dimension	238 x 188 x 40 mm			

Structure Drawing:

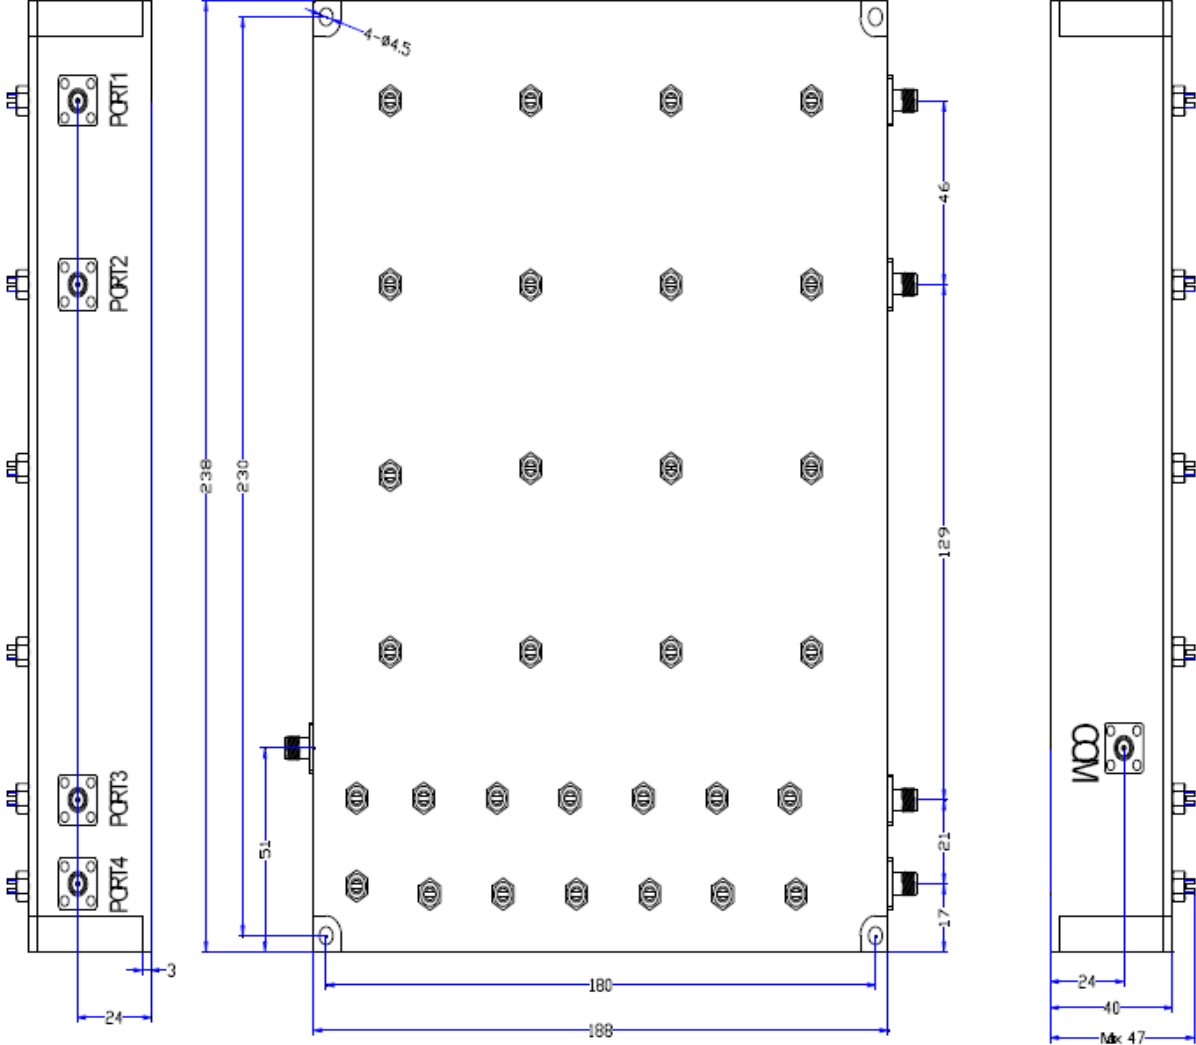

Product Image:

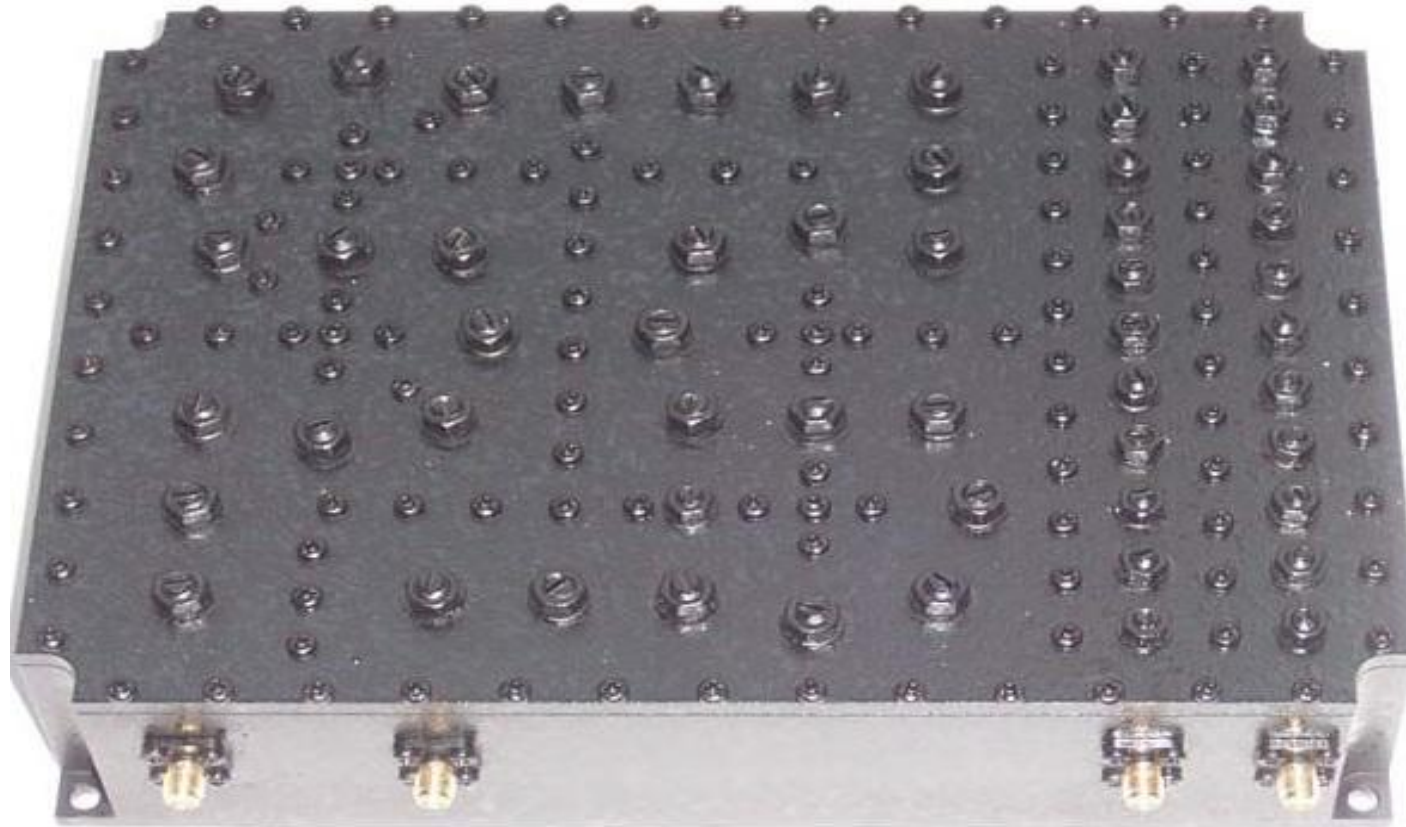

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA
E-mail : sales@csgnets.com, Website : www.csgnets.com