




UMTS Duplexer CSG 12000 UNX

PARAMETERS	SPECIFICATION	
Ports	RX	TX
Frequency Band	1710 ~ 1755 MHz	2110 ~ 2155 MHz
Band Width	45 MHz	45 MHz
Insertion Loss	≤ 0.3 dB	≤ 0.3 dB
Band Ripple	≤ 0.15 dB	≤ 0.15 dB
Return loss	≥ 20dB	≥ 20dB
Isolation	≥ 75 dB @ 2110 ~ 2155 MHz	≥ 70 dB @ 1710 ~ 1755 MHz
Power Rating	≥ 100 Watt	
Impedance	50 Ω	
Connectors	N-Female	
Temperature	-25 ~ + 65 °C	
Operating Humidity	5 ~ 95 %	
Dimension (Approx)	33 × 167 × 87 mm	
Weight	820 grams	

Structure Drawing:

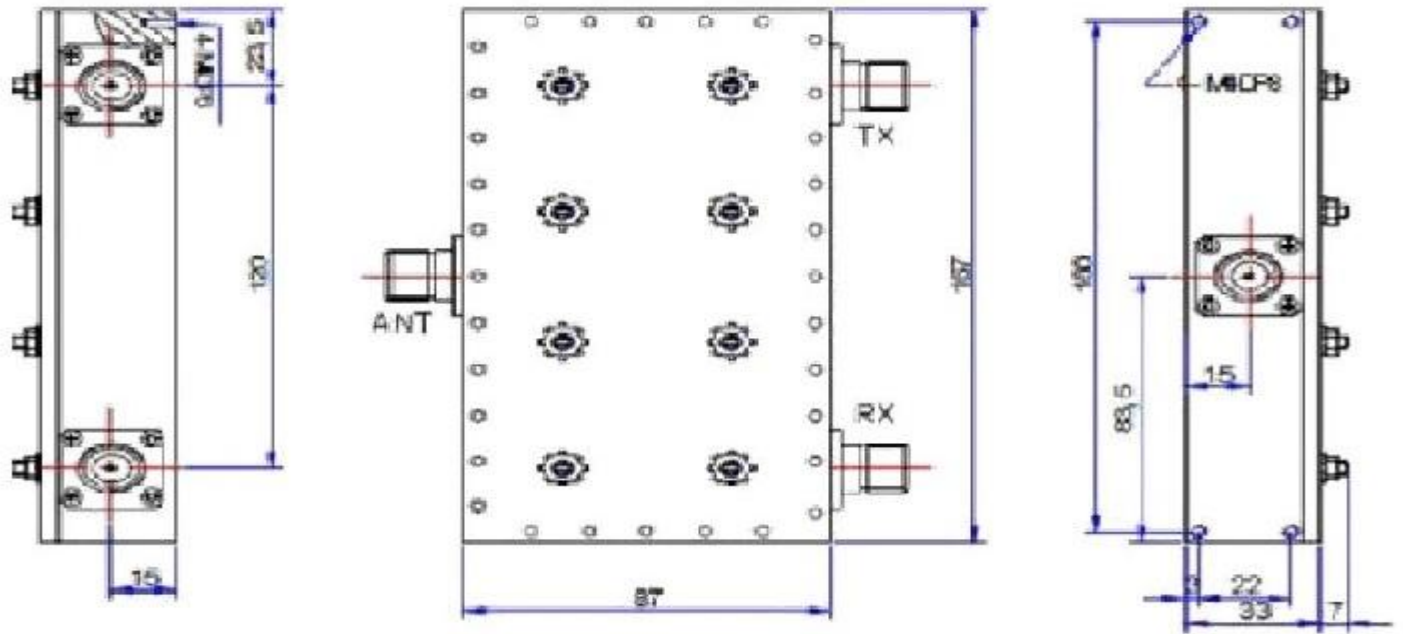

Product Image:



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT