




VHF CAVITY TRANSMITTER COMBINER CSG 3148174-6CTC

PARAMETERS	SPECIFICATIONS
Frequency Band	148 – 174 MHz
No. of Channels	6
Power Per Channel (Max.)	125 Watt
Frequency Spacing (Min.)	300 KHz
Insertion Loss (Max.)	3.2 dB
Insertion Loss (Min.)	2.2dB
Isolation Tx / Tx	90 dB
Isolation Ant / Tx	70 dB
Impedance	50 Ω
VSWR In / Out (Max.)	1.1:1 / 1.25: 1
Isolator	Dual
Connectors	N-Female
Temperature Range	-30 – + 60 °C
Dimension Approx. (H x W x D)	826 x 483 x 245 mm
Weight Approx.	37.2 Kg

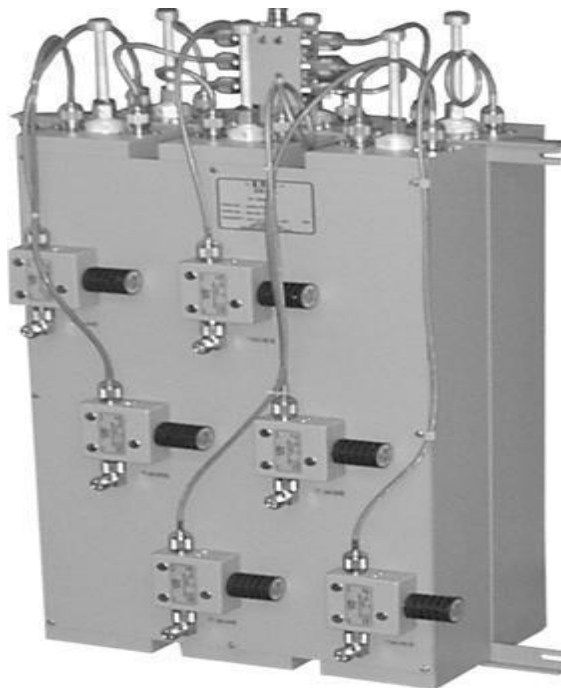

**OPTIONAL: CAVITY TRANSMITTER COMBINER IN OTHER CAPACITY e.g 2,3,4,5 CHANNELS
ARE AVAILABLE**

CSG Networks Pvt Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA

E-mail : sales@csgnets.com, Website : www.csgnets.com