




VHF HYBRID FERRITE TRANSMITTER CSG 31225-4HFTC

PARAMETERS	SPECIFICATIONS
Frequency Band	134 – 225 MHz
No. of Channels	4
Power Per Channel (Max.)	125 Watt
Insertion Loss	≤7.0 dB
Isolation Tx / Tx	≥100 dB
Isolation Ant / Tx	≥70 dB
Impedance	50 Ω
VSWR In / Out (Max.)	1.1:1 / 1.3: 1
Isolator	Dual
Connectors	N-Female
Temperature Range	-30 – + 60 °C
Dimension Approx. (H x W x D)	267 x 483 x 369mm
Weight Approx.	12.8 Kg

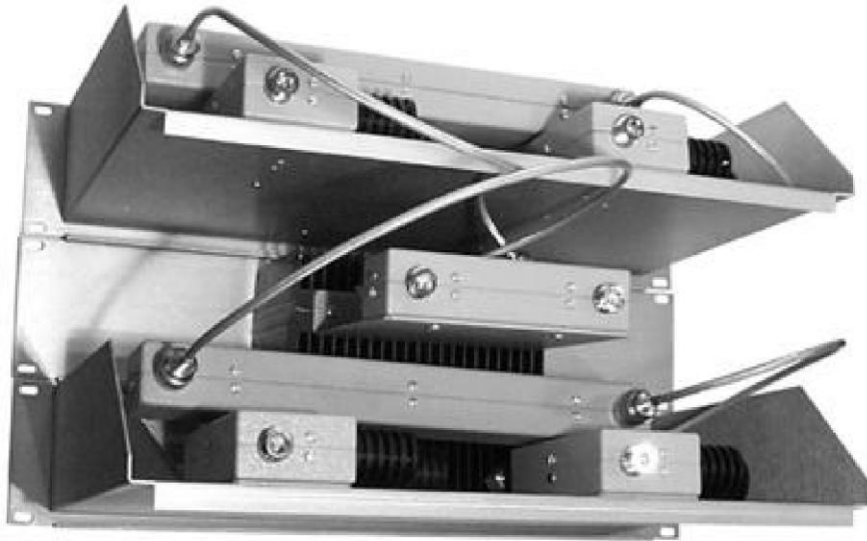

OPTIONAL: HYBRID FERRITE TRANSMITTER COMBINER IN OTHER CAPACITY
e.g 2, 3, CHANNELS ARE AVAILABLE