



UHF/TETRA Omni Antenna CSG 637507 ONX

PARAMETERS	SPECIFICATIONS
Frequency Range	375 – 490 MHz
Bandwidth	40 MHz
Gain	7.2 dBi
Beamwidth	E : 18°
Electrical Downtilt	8°
Polarization	Vertical
VSWR	≤ 1.5: 1
Max. Power	250 Watt
Impedance	50Ω
Lightning Protection	DC Grounded
Connector	N(Female) or Customized
Rated wind velocity	6 Mtr/s
Dimension (Approx)	Φ70 X 2835 mm
Weight (Approx)	4.4 kg (Exclude the Bracket)
Radome	Fiberglass
Pole Diameter	Φ50 ~ Φ70 mm




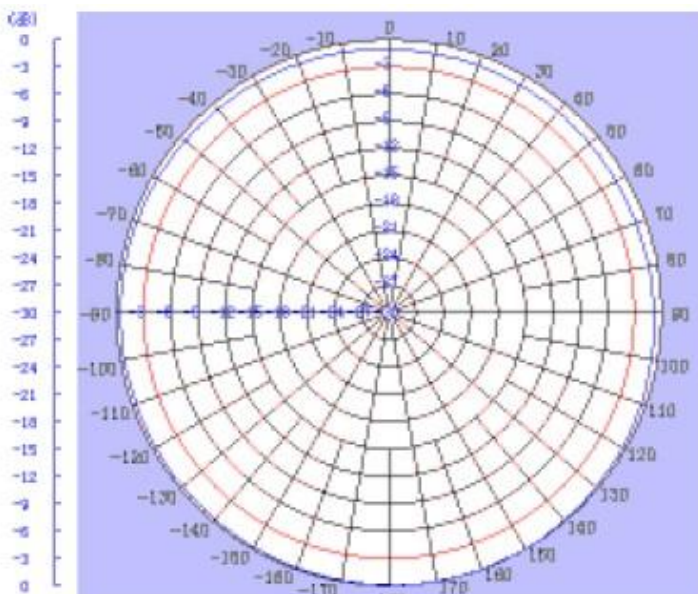

H Plane

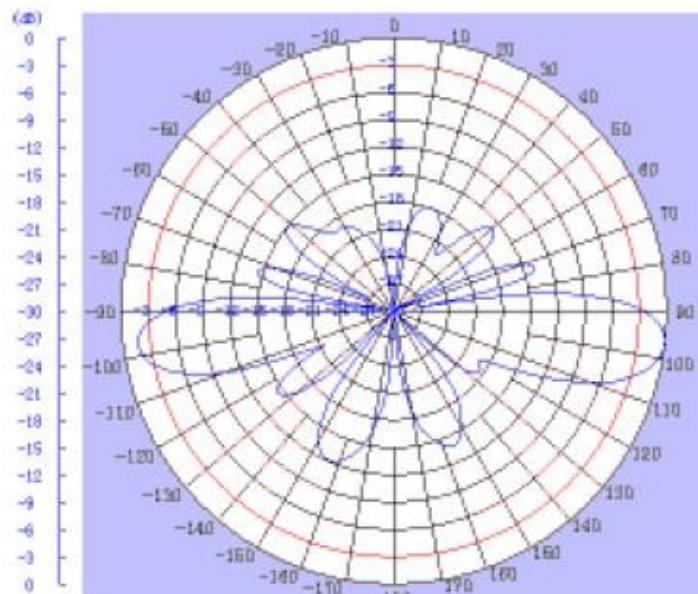

E Plane

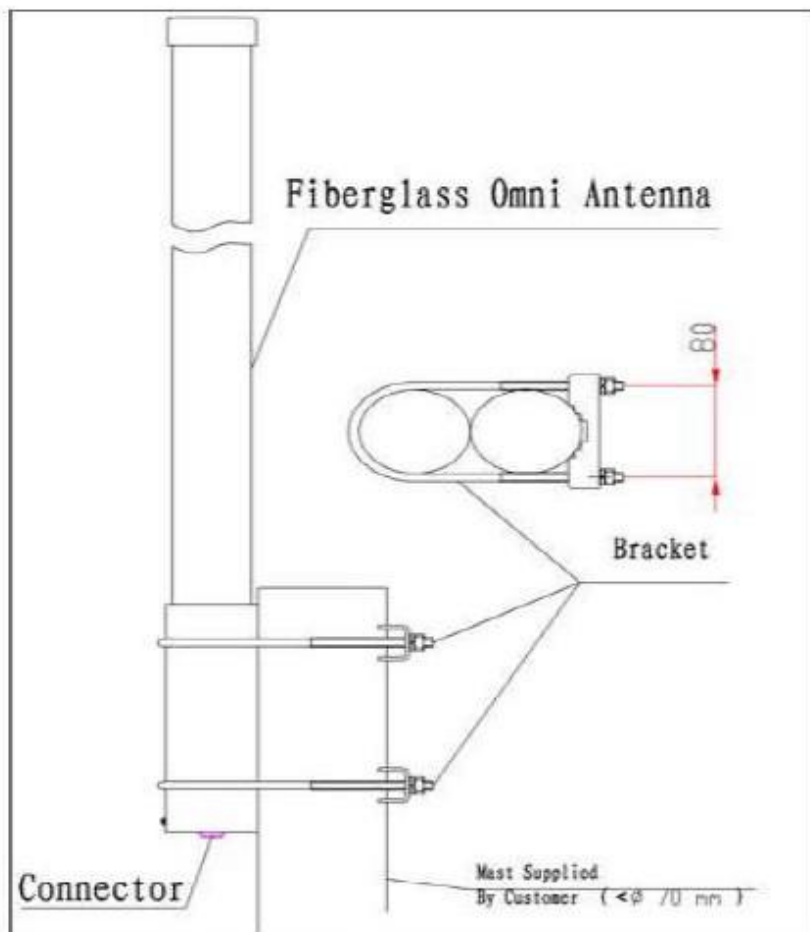

Note: Mounting Hardware and Brackets are supplied with Antenna
WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt. Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA

E-mail: sales@csgnets.com, Website: www.csgnets.com