
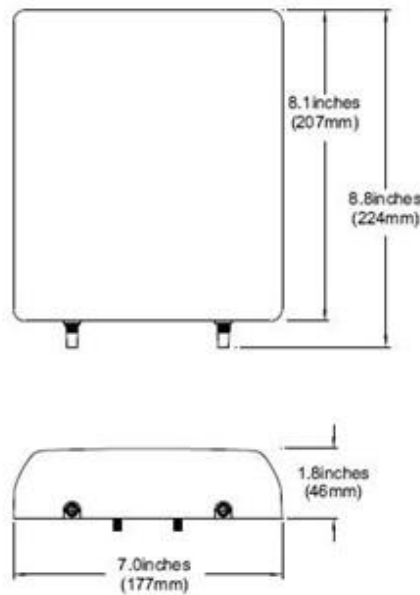


Dual Polarized LTE Panel Antenna CSG 61822012 DPSX

PARAMETERS	SPECIFICATIONS
Frequency Band	1800 – 2200 MHz
Gain	12 dBi
VSWR	$\leq 1.5:1$
Polarization	Horizontal & Vertical
Horizontal Beamwidth	65°
Vertical Beamwidth	28°
Impedance	50Ω
Front to Back Ratio	≥ 20 dB
Port Isolation	≥ 30 dB
Max. Power	100 Watt
Lightning Protection	DC Ground
Connector	2 x SMA(Male)
Dimension(Approx)	210 x 180 x 45 mm
Weight(Approx)	0.50 kg
Operating Temperature	-40°C - +60°C
Rated Wind Velocity	210 km/hr
Mast Diameter	Φ 30 ~ Φ 50 mm

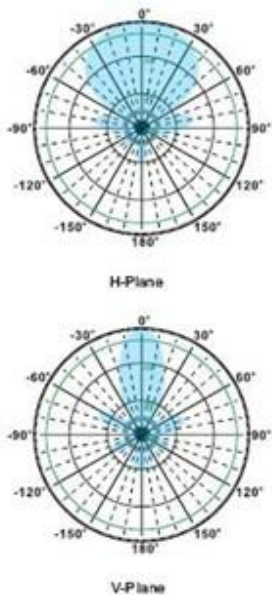

Note: Mounting Hardware and Brackets are supplied with Antenna

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Networks Pvt.Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad, Haryana-121004 INDIA

E-mail: sales@csgnets.com , Website: www.csgnets.com