

GSM / UMTS Magnetic Mount Antenna

CSG 68003X MMS

PARAMETERS	SPECIFICATIONS
Frequency Range	824 ~ 960 / 1710 ~ 2200 MHz
Gain	3.5 dBi
VSWR	≤ 1.5 : 1
Horizontal Beamwidth	360°
Polarization	Vertical
Max. Input Power	60 Watt
Impedance	50 Ω
Cable	RG 174
Connector	Huawei Connector, SMA(M), Sierra Wireless Connector
Antenna Length (Approx.)	90 mm
Weight	0.15 Kgs
Mounting	Magnetic Base
Colour	Black
Working Temperature	-20 °C ~ +55 °C



Note: Mounting Hardware and Brackets are supplied with Antenna

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

GSM / UMTS Magnetic Mount Antenna

CSG 68005X MMS

PARAMETERS	SPECIFICATIONS
Frequency Range	824 ~ 960 / 1710 ~ 2200 MHz
Gain	5.0 dBi
VSWR	≤ 1.5 : 1
Horizontal Beamwidth	360°
Polarization	Vertical
Max. Input Power	60 Watt
Impedance	50 Ω
Cable	RG 174
Connector	Huawei Connector, SMA(M), Sierra Wireless Connector
Antenna Length (Approx.)	270 mm
Weight	0.20 Kgs
Mounting	Magnetic Base
Colour	Black
Working Temperature	-20 °C ~ +55 °C




Note: Mounting Hardware and Brackets are supplied with Antenna

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

GSM / UMTS Magnetic Mount Antenna

CSG 68009X MMS

PARAMETERS	SPECIFICATIONS
Frequency Range	824 ~ 960 / 1710 ~ 2200 MHz
Gain	9.0 dBi
VSWR	≤ 1.5 : 1
Horizontal Beamwidth	360°
Polarization	Vertical
Max. Input Power	60 Watt
Impedance	50 Ω
Cable	RG 174
Connector	Huawei Connector, SMA(M), Sierra Wireless Connector
Antenna Length (Approx.)	720 mm
Weight	0.35 Kgs
Mounting	Magnetic Base
Colour	Black
Working Temperature	-20 °C ~ +55 °C

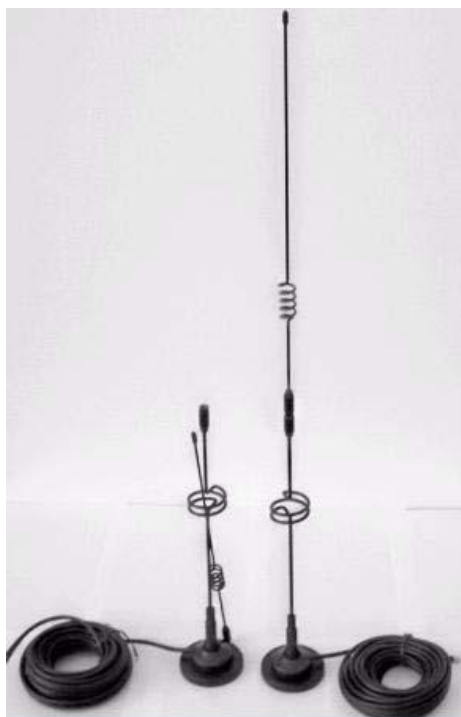

Note: Mounting Hardware and Brackets are supplied with Antenna

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT