




2400MHz BAND FILTERS

CSG 42400 NX

PARAMETERS	SPECIFICATIONS
Bandwidth	22 MHz
Insertion Loss	≤ 3.0 dB
Ripple	≤ 0.80 dB
Return Loss	≥ 15 dB
Power Handling	50 Watt
Port Connectors	N-Female
Impedance	50 Ω
Operating Temperature	-40 to +85 °C
Environmental	IP65

Models	Center Frequencies	Out Of Band Rejection
CSG-2412/22-01	2412MHz-Channel 1	≥ 60 dB@DC~2387MHz ≥ 60 dB@2437~2550MHz ≥ 90 dBc@4813~4835MHz
CSG-2437/22-01	2437MHz-Channel 6	≥ 60 dB@DC~2412MHz ≥ 60 dB@2462~2550MHz ≥ 90 dBc@4863~4885MHz
CSG-2462/22-01	2462MHz-Channel 11	≥ 60 dB@DC~2437MHz ≥ 60 dB@2487~2550MHz ≥ 90 dBc@4913~4935MHz

Product Picture

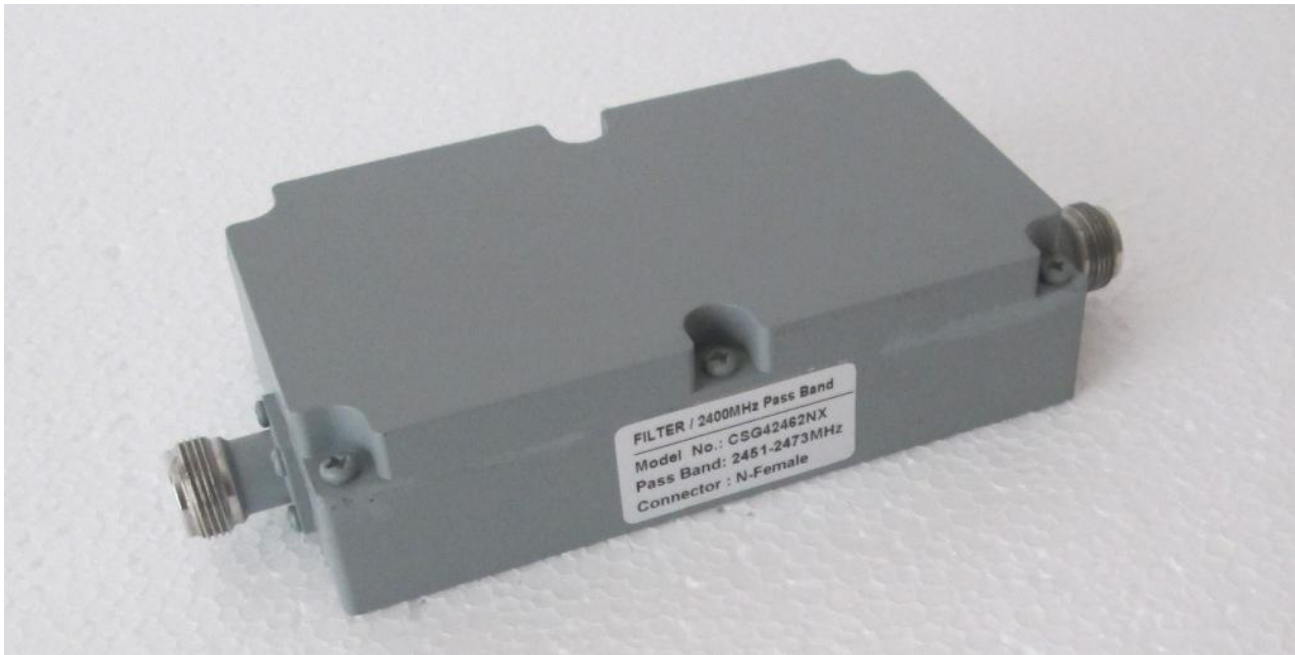

Structure Dimensions:

