


Mobile Duplexer CSG 2750 NX

PARAMETERS	SPECIFICATIONS
Frequency Range	750 ~ 810 MHz
Bandwidth	6 MHz
Separation Low / High	24 MHz
Insertion Loss	≤1.20 dB
Return Loss	≥15 dB
Isolation	≥60 dB (Typically 65 dB)
Power Rating	25 Watt
Impedance	50 Ω
Connectors	N-Female
Dimensions (HxWxD)	32 x 155 x 120 mm
Weight (Approx.)	500 grams
Operating Humidity	5% ~ 95%
Operating Temperature	-5 ⁰ C ~ +60 ⁰ C

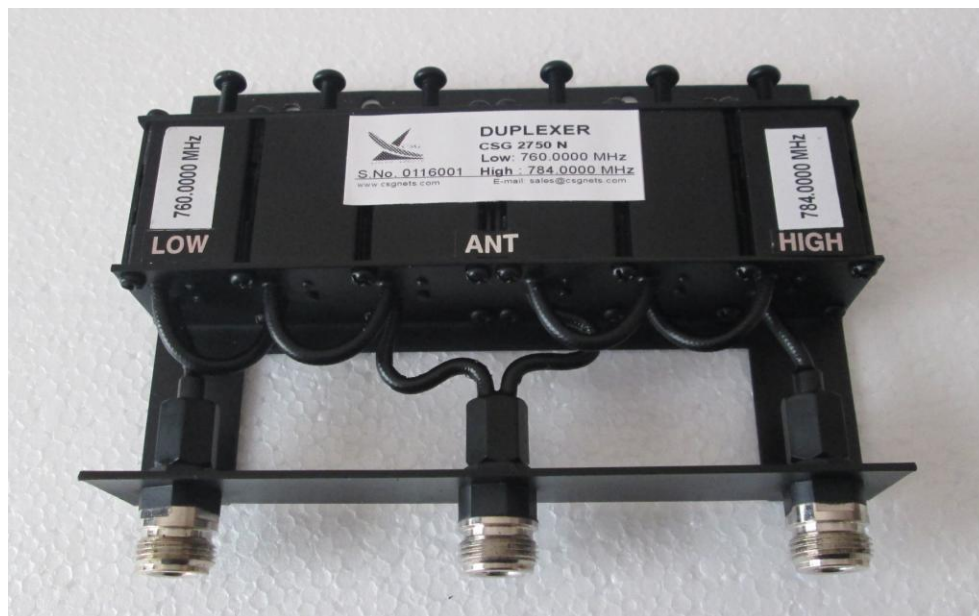

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

Mobile Duplexer

CSG 2820 NX

PARAMETERS	SPECIFICATIONS
Frequency Range	810 ~ 870 MHz
Bandwidth	5 MHz
Separation Low / High	40 MHz
Insertion Loss	≤1.20 dB
Return Loss	≥15 dB
Isolation	≥60 dB (Typically 65 dB)
Power Rating	25 Watt
Impedance	50 Ω
Connectors	N-Female
Dimensions (HxWxD)	32 x 155 x 120 mm
Weight (Approx.)	500 grams
Operating Humidity	5% ~ 95%
Operating Temperature	-5°C ~ +60°C



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT