



# 3 Way Power Splitter (698-2700MHz)

## P/N#CSG36982700-3NCX2

### Design Features


- Wide Frequency Band
- Low Insertion Loss
- Low VSWR
- Low PIM
- Widely used in IBS

PARAMETERS	SPECIFICATIONS
Frequency Band	698-2700MHz
Split Loss	4.8dB nominal
Insertion Loss	$\leq \pm 0.2$ dB nominal
VSWR	$\leq 1.30$
Power	300 Watt
PIM	$\leq -155$ dBc@2*20W / 43dBm
Impedance	50 $\Omega$
Operating Temperature	-30°C to +70°C
Relative Humidity	$\leq 95\%$
Applications	Indoor
Waterproof Grade	IP55
Dimensions ( W x D x H )	233 x 25 x 25mm (excluding connectors)
Weight	0.40 Kg
Connectors	N-Female ( DIN optional )

## Product Picture:



## Dimensions:

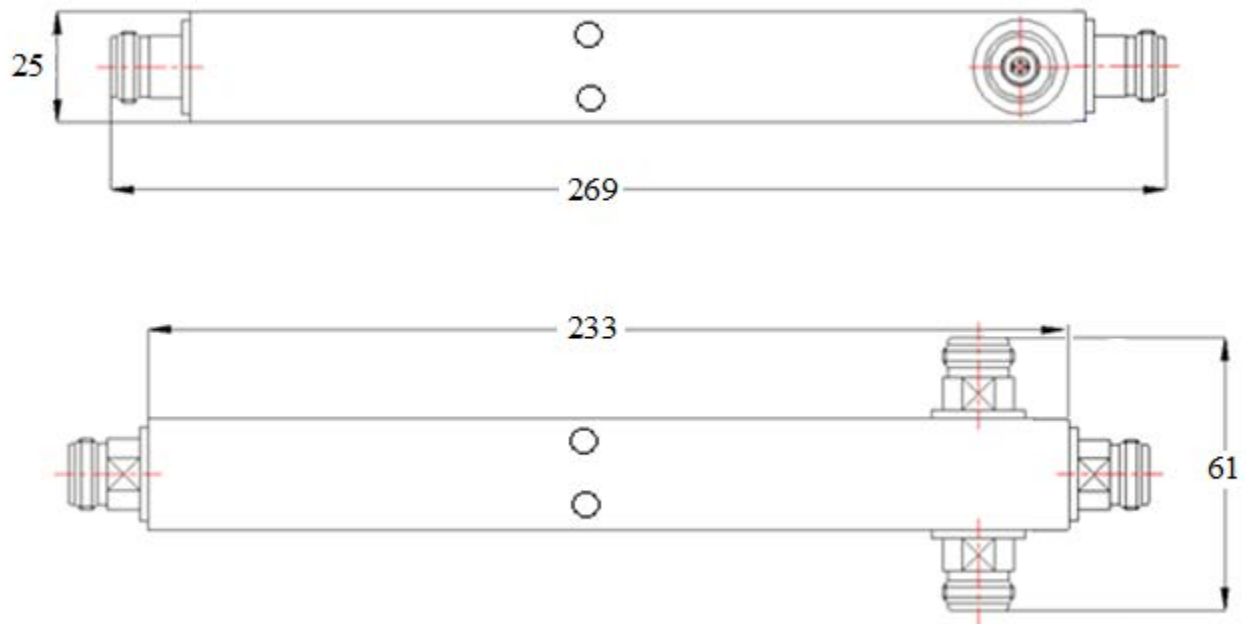

**WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT**