



698-3800MHz (5G) Power Splitters


Product Features

- Wide Frequency Band 698-3800MHz
- 5G Compliant
- Low Passive Intermodulation (-150dBc)
- Low VSWR & Insertion Loss
- Widely used for IBS & DAS

Technical & Mechanical Specifications

Model No.	CSG3693800-2NC1	CSG3693800-3NC1	CSG3693800-4NC1
Frequency Range	698 - 3800 MHz		
Model	2-way	3-way	4-way
Split Loss	3.0 dB	4.8 dB	6.0 dB
Insertion Loss	≤ 0.3 dB	≤ 0.5 dB	≤ 0.5 dB
VSWR	≤ 1.3 (Type N) / ≤ 1.3 (Type DIN)		
PIM	≤ -150 dBc@2*43dBm		
Power	300 Watt (average)		
Connector	N-Female		
Operating Temperature	-35°C to + 65°C		
Humidity	5 - 95%		
Application	Indoor or Outdoor, IP60 / IP65		
Colour	Black		
Dimensions	See figures below		
Weight	0.45Kg	0.55 Kg	0.65 Kg

Structure Drawing

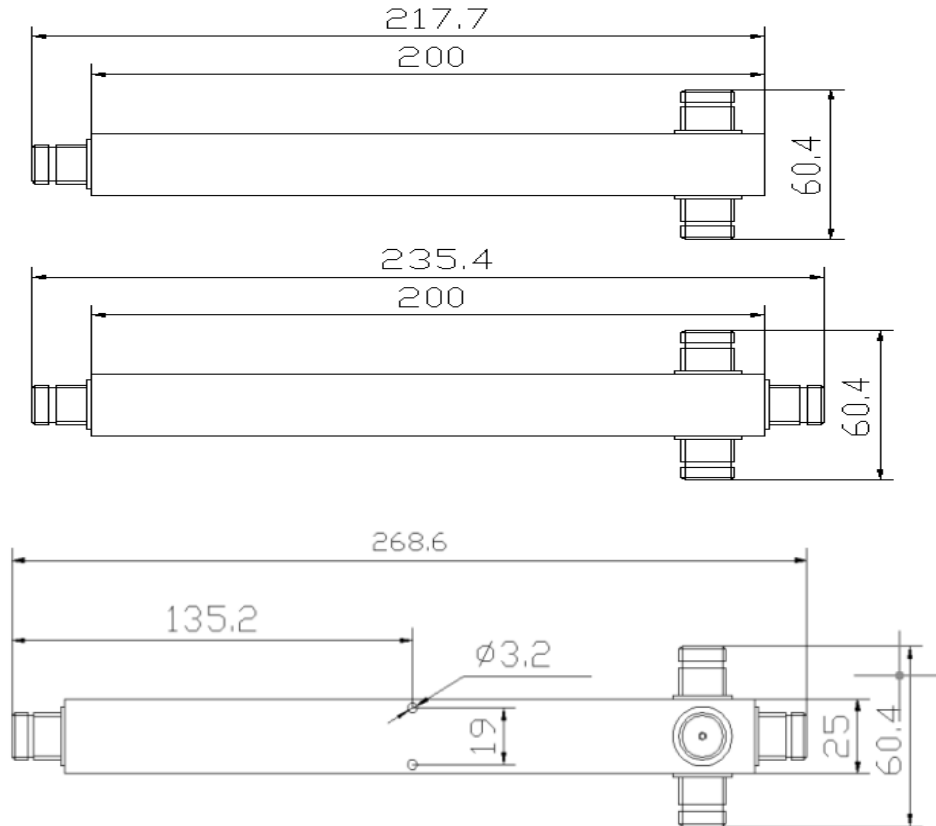

Product Pictures



WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT

CSG Network Pvt.Ltd. 109-110, HUDA Industrial Area Sector-59 Faridabad,Haryana-121004 INDIA
E-mail : sales@csgnets.com , Website : www.csgnets.com