


Hybrid Combiner 2:1 (698-2700MHz)

P/N#CSG36982700-2I/1OHC-200NX

Product Description

The Hybrid combiner is a wideband power combiner specifically designed to operate in all wireless frequency bands from 698-2700MHz, including CDMA, GSM, DCS, UMTS and LTE etc. The product is particularly suited for power combination in Base station systems.

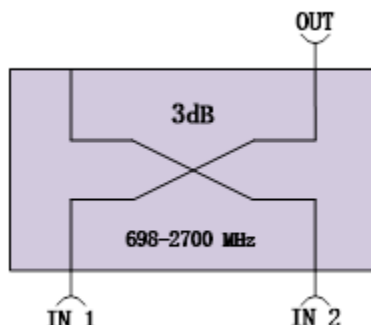


PARAMETERS	SPECIFICATIONS
Frequency Band	698-2700MHz
Insertion Loss	3±0.5 dB
Return Loss (dB)	≤-18 dB
Isolation(dB)	≥20 dB
PIM3	Input Port: ≤-120dBc @ 2 x 20 W / 43dBm
Input Power	≤ 200 Watt
Impedance	50Ω
Dimensions, HxWxD	134 x 43 x 62 mm (excluding connectors and mounting bracket)
Weight	0.800 kg
Connectors	N-Female
Mounting	Wall Mounted
Operating Temperature	-25°C to +55°C
Relative Humidity	≤ 95%
Applications	Indoor
Waterproof Grade	IP55

Product Picture:



Dimensions:

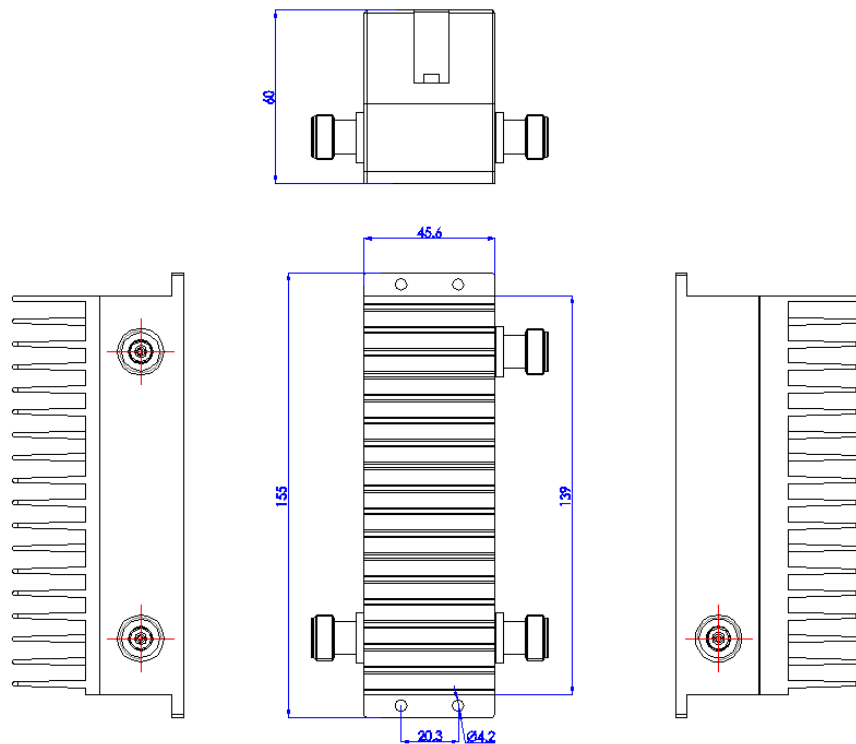

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT