



698-2700MHz LOW PIM Termination

P/N# CSG72700LD-100NRX1

Design Features


- Wide frequency range
- Low VSWR
- High stability
- Low PIM

PARAMETERS	SPECIFICATIONS
Frequency Range	698-2700 MHz
VSWR	≤ 1.20
PIM / Intermodulation 3 rd order	5W/10W/30W $\leq -153\text{dBc}$ @ 2×2W / 43dBm 100W $\leq -153\text{dBc}$ @ 2×20W / 43dBm
Power	100 Watt @ 25°C
Impedance	50 Ω
Operating Temperature	-35°C to +125°C
Relative Humidity	$\leq 95\%$
Application	Indoor
Waterproof Grade	IP55
Dimensions (W x D x H)	176 x 176 x 66 mm (excluding connector and brackets)
Weight	2.8 kg
Connector	N-Male

Product picture:



Dimensions:

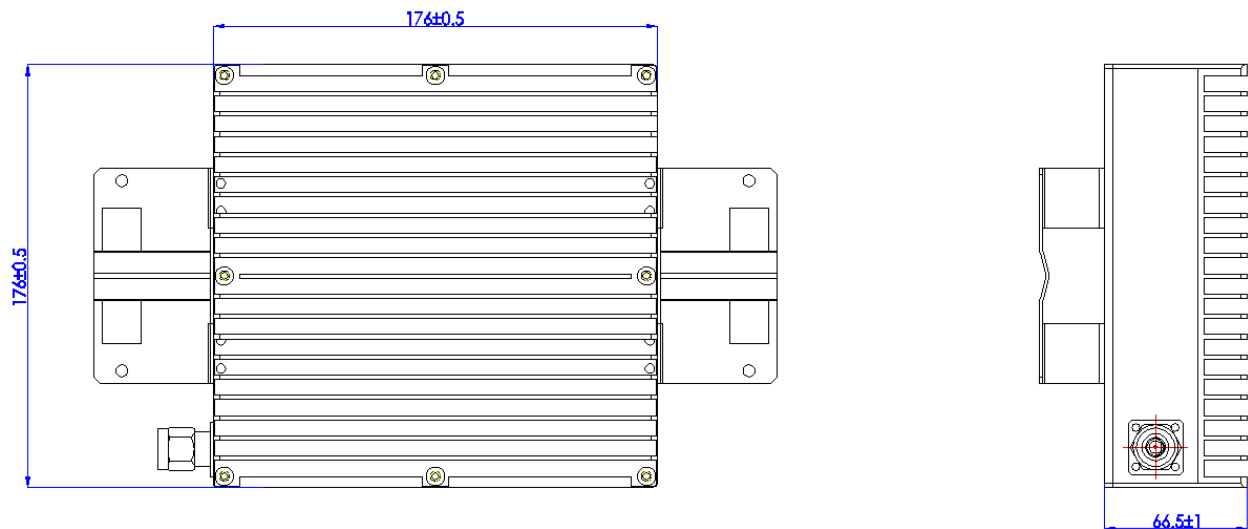

WE ALSO UNDERTAKE DESIGNS PER YOUR REQUIREMENT